


Perfection in Every Detail

32 Gating points per part

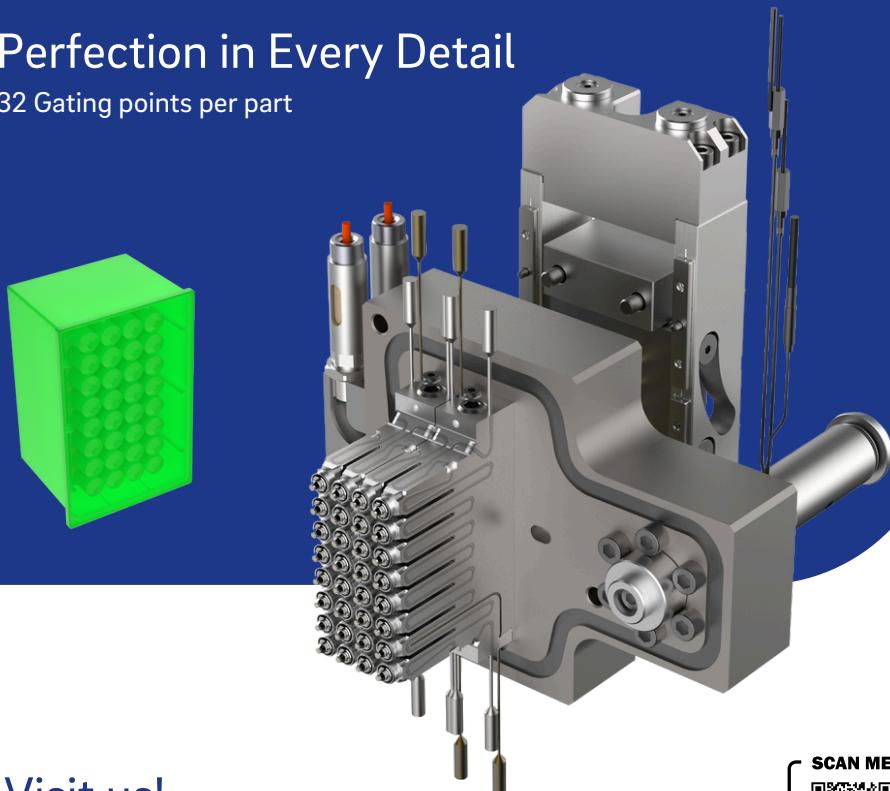

Visit us!

Hall 1 | Booth C-44

SCAN ME



## Hot Runner Technology

- 32 gating points on an area of only 70 x 35 mm with a compact 9 x 9 mm pitch
- 16-drop ClusterFlow in a 2 x 8 grid
- Scalable design e.g., 96-drop or 128-drop System
- Wear protected needle guide for long service life

## Needle Valve Technology

- Control of the electronic drive, directly via the injection molding machine
- Synchronous and safe opening/closing of all needles
- Optimal force transmission through roller chains

## Working Together to achieve the Best Results

In close cooperation with our project partners:

- Exchange of knowledge and experience, from concept to sampling
- Ideal integration of hot runner and mold components
- Contour-based temperature control, exactly where it is needed